


### DESCRIPTION:

These elastomers are a unique composite of high quality silicone and conductive microscopic particles, manufactured to strict formulations, yielding gasketing materials that meet nearly every military and/or electronic requirement. Ja-Bar produces a wide variety of conductive elastomers to choose from. This enables you, the user, to select the best-suited compound for your application; keeping in mind not only performance characteristics, but economics as well. If you fail to find the perfect compound to fit your needs, within our current listing, we will custom compound.

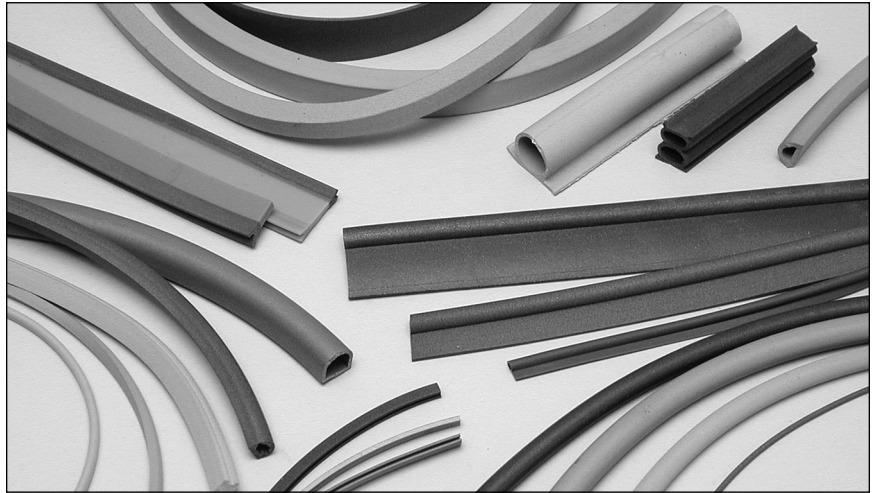

### APPLICATION:

Frequently, your applications may require extremely high shielding effectiveness, environmental sealing, reliability, and durability. Ja-Bar's family of conductive silicone elastomers can fill these needs.

The following part number system was devised to segregate the various types of conductive elastomers available at Ja-Bar. The products beginning with 8xx-, depict the use of microscopic particles to establish a conductive path within the elastomer, yielding a highly versatile group of gasketing materials for use in EMI/RFI suppression. Each compound has its own unique properties therefore it is essential that a distinction be made.

The second digit in the 800 series specifies the type of elastomer to be used and the grade of the final product. Commercial grade shielding elastomers are for those applications that require slightly less performance and are price sensitive. The Military Grade material is produced to meet the more demanding EMI/RFI requirements of our industry, and can be certified to meet the requirements of MIL-DTL-83528, Missile and Weapons Specifications.

80x	Military Grade / Standard Silicone
81x	Military Grade / Fluorosilicone
82x	Military Grade / EPDM
83x	Military Grade/ Fluoroelastomer Co-polymer
84x	Military Grade/ Combination: Conductive / Non-conductive
85x	Commercial Grade / Standard Silicone
86x	Commercial Grade / Fluorosilicone
878	Silver Coated Silicone
88x	One Part "Form-In-Place" Gasket Material
89x	Two Part "Room Temperature Cure" "Form-In-Place" Material

The third digit classifies the conductive filler type used in the compound. The different classes are as follows:

8x0	Non-Corrosive Particle
8x1	Carbon
8x2	Nickel
8x3	Silver Plated Glass
8x4	Silver Plated Nickel
8x5	Silver Plated Aluminum
8x6	Silver Plated Copper
8x7	Silver - Low Density
8x8	Silver - High Density
8x9	Reinforced Silver Plated Copper

The next set of four digits establishes the end products dimensional characteristics. The first of these four tell us whether the part is of a standard configuration, or a custom design.

8XX-0XXX	Standard
8XX-1XXX	Custom

If a "1" appears, the next three digits are assigned from our numerical listing of custom parts. If the part has been determined to be "standard", the next digit will determine the product family:

8XX-01XX	Sheet Stock
8XX-02XX	Extrusion - Round
8XX-03XX	Extrusion - Rectangular
8XX-04XX	Extrusion - "D-Shaped"
8XX-05XX	Extrusion - "P-Shaped"
8XX-06XX	Extrusion - "U-Channel"
8XX-07XX	O-Rings
8XX-08XX	Flat Washer
8XX-09XX	Standard Connector
8XX-28XX	Standard Waveguide

# Conductive Particle Filled Elastomers

## Series 800

### PERFORMANCE CHARACTERISTIC: MILITARY GRADE MATERIAL TYPES PER MIL-DTL-83528

Series	U of M	801	802	812	803	813	804	814	805	815
Filler	—	C	Ni/Gr	Ni/Gr	AG/Glass	AG/Glass	AG/Ni	AG/Ni	AG/Al	AG/Al
Elastomer	—	Silicone	Silicone	Fluoro-silicone	Silicone	Fluoro-silicone	Silicone	Fluoro-silicone	Silicone	Fluoro-silicone
MIL-83528 TYPE	—	—	—	—	M	—	L	—	B	D
Operating Temp. (°C)	Min	-55	-55	-55	55	55	-55	-55	-55	-55
	Max	+200	+150	+150	+160	+160	+125	+160	+160	+160
Hardness	Shore A	70	30-70	65	65	65	75	70	65	70
Specific Gravity	g/cc	1.2	1.95	1.95	1.9	1.9	4.0	4.4	2.0	2.0
Compression Deflection	% min	3.5	3.5	3.0	3.5	3.5	3.5	3.5	3.5	3.5
Tensile Strength	#/in sq	650	150	150	200	200	200	180	200	180
Elongation	Min-	100	100	100	100	100	100	60	100	60
	Max	—	—	—	300	300	300	260	300	260
Compression Set	%	40	35	25	30	30	32	30	32	30
Tear Strength	#/in	40	40	35	30	30	30	35	30	35
Volume Res.	Ohm-cm	7.0	.10	0.1	.006	.006	.005	.012	.008	.012
Shielding Effectiveness as tested per Mil-DTL-83528	100 MHz	80	100	100	100	100	120	120	120	120
	500 MHz	80	100	100	100	90	120	120	120	120
	2 GHz	60	100	100	90	90	120	115	115	115
	10 GHz	50	100	100	90	90	110	110	115	115

Series	U of M	806	816	806	807	808	818	808	809	822
Filler	—	Silver Copper	Silver Copper	Silver Copper	Silver Low Density	Silver Pure	Silver Pure	Silver Pure	Silver Copper	Nickel Graphite
Elastomer	—	Silicone	Fluoro-silicone	Silicone	Silicone	Silicone	Fluoro-silicone	Silicone	Silicone	EPDM
MIL-83528 TYPE	—	A	C	K	J	E	F	H	G	N/A
Operating Temp. (°C)	MIN	-55	-55	-45	-55	-55	-65	-55	-45	-30
	MAX	+125	+125	+125	+160	+160	+160	+160	+125	+100
Hardness	Shore A	65	75	85	45	65	75	80	80	75
Specific Gravity	g/cc	3.5	4.1	3.8	1.8	3.5	4.0	4.0	4.75	2.1
Compression Deflection	(% min)	3.5	3.5	2.5	8.0	2.5	3.5	2.5	2.5	2.0
Tensile Strength	(#/in sq)	200	180	400	150	300	250	400	600	200
Elongation	MIN	100	100	100	50	200	100	90	20	75
	MAX	300	300	300	250	500	300	290	N/A	—
Compression Set	(%)	32	35	35	35	45	60	60	N/A	40
Tear Strength	(#/in)	25	35	40	20	50	40	60	70	70
Volume Res.	(ohm-cm)	.004	.010	.005	.010	.002	.002	.005	.007	5
Shielding Effectiveness as tested per Mil-DTL-83528	100 MHz	120	120	120	100	120	120	120	120	90
	500 MHz	120	120	120	100	120	120	120	120	90
	2 GHz	120	120	120	90	120	120	120	120	80
	10 GHz	120	115	120	90	120	120	120	120	80

### PERFORMANCE CHARACTERISTICS: COMMERCIAL GRADE MATERIAL TYPES

Series	852	853	854	855	856	857	858
Filler	Pure Nickel	Silver Glass	Silver Nickel	Silver Aluminum	Silver Copper	Silver Low Density	Silver Pure
Operating Temp. (C) MIN	-55	-55	-55	-55	-55	-55	-65
Operating Temp. (C) MAX	+125	+170	+180	+200	+125	+160	+180
Specific Gravity	3.05	1.8	4.0	2.0	3.5	1.7	4.0
Hardness Available (Shore A)	45-75	45-75	45-75	45-75	45-75	45-75	45-75
Tensile Strength (# / in. sq)	400	200	200	200	200	150	200
Elongation * (%)	300	280	300	280	300	100	300
Tear Strength* (#/in)	40	35	35	35	35	25	60
Volume Res.* (ohm-cm)	2.0	.05	.06	.08	.06	.1	.04
Shielding Effectiveness (20 MHz – 1 GHz) min	60	75	80	75	85	70	85

# Conductive Particle Filled Elastomers

## Series 800

### OUTGASSING OF CONDUCTIVE ELASTOMERS

Many of the conductive elastomers produced by Ja-Bar Silicone are silicone compounds. Due to the high electrical insulative properties of silicone, there has been growing concern that the outgassing of volatile residues from silicone based conductive compounds may interfere with critical electrical contacts. NASA has set specification limits for both the **Total Mass Loss (TML)** and **Collected Volatile Condensable Materials (CVCM)** as determined by ASTM E595-84 for use in spacecraft applications. The normally accepted limit for TML is 1.00% and the CVCM is 0.10%.

Use of materials meeting the above listed "accepted criteria" does not deem the materials acceptable for your application. Ja-Bar Silicone has specific manufacturing procedures designed to reduce both TML and CVCM to well below acceptable limits, thereby further reducing the potential detrimental outgassing. Listed below are typical results you can expect of Ja-Bar produced Conductive Silicone Compounds when tested to **ASTM E 595-84**.

Series	Conductive Particle	TML %	CVCM %
802	Nickel	.09	.05
803	Silver Glass	.10	.02
804	Silver Nickel	.09	.03
805	Silver Aluminum	.11	.01
806	Silver Copper	.07	.02
807	Silver, Low Density	.20	.11
808	Silver, High Density	.10	.01

Further testing performed on Ja-Bar Series 806 using test parameters other than that required in ASTM E595 yielded the following results.

Temperature	Time (days)	Vacuum Torr	TML %
Room Temp	14	5 x 10 (-9)	.069
Room Temp	27	8 x 10 (-10)	.20
150°F	6	2 x 10 (-7)	.35
250°F	4	3 x 10 (-7)	.35

### Standard Sheet Stock


Part No.	Thickness	Sheet Size	Tolerance
0101	.020	10 x 10	+/- .004
0102	.032	10 x 10	+/- .004
0103	.062	10 x 10	+/- .005
0104	.093	10 x 10	+/- .007
0105	.125	10 x 10	+/- .010
0106	.020	12 x 12	+/- .004
0107	.032	12 x 12	+/- .004
0108	.062	12 x 12	+/- .005
0109	.093	12 x 12	+/- .007
0110	.125	12 x 12	+/- .010
0111	.020	15 x 20	+/- .004
0112	.032	15 x 20	+/- .005
0113	.062	15 x 20	+/- .005
0114	.093	15 x 20	+/- .008
0115	.125	15 x 20	+/- .010
0116	.020	17.8 x 20.5	+/- .005
0117	.032	17.8 x 20.5	+/- .005
0118	.062	17.8 x 20.5	+/- .005
0119	.093	17.8 x 20.5	+/- .008
0120	.125	17.8 x 20.5	+/- .010
0121	.027	10 x 10	+/- .004
0122	.030	10 x 10	+/- .004
0123	.040	10 x 10	+/- .004
0124	.047	10 x 10	+/- .004
0125	.060	10 x 10	+/- .005
0126	.027	12 x 12	+/- .004
0127	.030	12 x 12	+/- .004
0128	.040	12 x 12	+/- .004
0129	.047	12 x 12	+/- .004
0130	.060	12 x 12	+/- .005
0131	.027	15 x 20	+/- .004
0132	.030	15 x 20	+/- .004
0133	.040	15 x 20	+/- .005
0134	.047	15 x 20	+/- .005
0135	.060	15 x 20	+/- .005
0136	.027	17.8 x 20.5	+/- .005
0137	.030	17.8 x 20.5	+/- .005
0138	.040	17.8 x 20.5	+/- .005
0139	.047	17.8 x 20.5	+/- .005
0140	.060	17.8 x 20.5	+/- .005
0141	.020	10 x 20	+/- .004
0142	.027	10 x 20	+/- .004
0143	.030	10 x 20	+/- .004
0144	.032	10 x 20	+/- .005
0145	.040	10 x 20	+/- .005
0146	.047	10 x 20	+/- .005
0147	.060	10 x 20	+/- .005
0148	.062	10 x 20	+/- .005
0149	.093	10 x 20	+/- .008
0150	.125	10 x 20	+/- .010
0151	.020	12 x 18	+/- .004
0152	.027	12 x 18	+/- .004
0153	.030	12 x 18	+/- .004
0154	.032	12 x 18	+/- .005
0155	.040	12 x 18	+/- .005
0156	.047	12 x 18	+/- .005
0157	.060	12 x 18	+/- .005
0158	.062	12 x 18	+/- .005
0159	.093	12 x 18	+/- .008
0160	.125	12 x 18	+/- .010

# Conductive Particle Filled Elastomers

## Series 800


### Solid Round Stock

Part No.	"D"	M83528 Dash
0201	.040	1/001
0202	.053	1/002
0203	.062	1/003
0204	.070	1/004
0212	.080	1/005
0205	.093	1/006
0206	.103	1/007
0213	.112	N/A
0207	.119	1/008
0208	.125	1/009
0214	.130	N/A
0209	.139	1/010
0215	.150	N/A
0216	.160	N/A
0217	.188	1/011
0210	.216	1/012
0211	.250	1/013





### Solid Rectangle Stock

Part No.	"A"	"B"	M83528 Dash
0314	.032	.032	N/A
0301	.063	.042	9/001
0302	.095	.062	9/002
0303	.120	.075	9/003
0304	.125	.062	9/004
0305	.156	.062	9/005
0306	.250	.062	9/006
0307	.500	.075	9/007
0308	.500	.125	9/008
0309	.500	.188	9/009
0310	.750	.062	9/010
0311	.880	.062	9/011
0312	1.000	.250	9/012
0313	1.180	.062	9/013
0315	.060	.080	N/A



### Hollow Round Stock

Part No.	"OD"	"ID"	M83528 Dash
0226	.070	.025	N/A
0227	.093	.035	N/A
0228	.103	.040	11/007
0220	.125	.045	11/001
0229	.125	.062	11/006
0221	.156	.050	11/002
0230	.177	.079	11/008
0222	.250	.125	11/003
0223	.312	.192	11/004
0224	.375	.250	11/005
0225	.437	.250	N/A

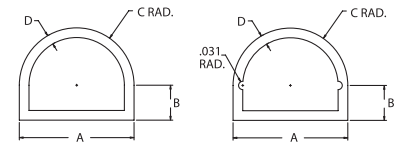


### "D" Profile - Hollow Stock

Part No.	"A"	"B"	"C"	"D"	M83528 Dash
0401	.156	.045	.078	.045	N/A
0402	.156	.078	.078	.045	7/001a
0403	.187	.093	.093	.050	7/002a
0404	.250	.125	.125	.065	7/007a
0405	.312	.156	.156	.062	7/003a
0406	.312	.156	.156	.062	7/004b
0408	.487	.080	.244	.080	7/006a
0409	.312	.200	.112	.062	7/005a


### "D" Profile - Solid Stock

Part No.	"A"	"B"	"C"	M83528 Dash
0410	.031	.055	.064	N/A
0411	.031	.062	.068	3/001
0412	.047	.062	.068	N/A
0413	.047	.094	.078	3/002
0414	.039	.078	.089	3/003
0415	.047	.094	.094	3/004
0416	.031	.062	.100	3/005
0417	.075	.150	.110	3/006
0418	.061	.122	.131	N/A
0419	.061	.124	.136	3/007
0420	.059	.118	.156	3/008
0421	.078	.156	.156	3/009
0422	.089	.178	.175	3/010
0423	.094	.188	.188	3/011
0424	.125	.250	.250	3/012




### "P" Profile Stock

Part No.	"A"	"B"	"C"	"D"	M83528 Dash
0501	.200	.080	.275	.062	N/A
0502	.200	.080	.650	.062	8/001
0503	.250	.125	.250	.062	8/002
0504	.250	.125	.375	.062	8/003
0505	.250	.150	.375	.062	8/004
0506	.250	.125	.625	.062	N/A
0507	.312	.187	.563	.062	8/005
0508	.360	.255	.420	.070	8/006
0509	.200	.080	.275	.062	8/007
0510	.250	.125	.625	.062	8/008



### "U" Profile Stock

Part No.	"A"	"B"	"C"	"D"	M83528 Dash
0601	.100	.100	.034	.033	10/001
0602	.126	.110	.026	.050	10/002
0603	.126	.225	.020	.075	10/003
0604	.156	.156	.062	.047	10/004
0605	.175	.156	.047	.047	N/A
0606	.175	.156	.047	.075	10/005
0607	.327	.235	.062	.115	10/006



# Conductive Particle Filled Elastomers

## Series 800


Part No.	CS "B"	I.D. "C"	GRP I	GRP II	GRP III	GRP IV
0701	.030	.442	—	—	—	5/001
0702	.030	.577	—	—	—	5/002
0703	.030	.692	—	—	—	5/003
0704	.030	.817	—	—	—	5/004
0705	.039	.425	—	—	—	5/005
0706	.048	.295	—	—	—	5/006
0707	.050	.533	—	—	—	5/007
0708	.051	.446	—	—	—	5/008
0709	.057	.415	—	—	—	5/009
0710	.063	.541	—	—	—	5/010
0711	.063	.648	—	—	—	5/011
0712	.068	.847	—	—	—	5/012
0713	.068	1.182	—	—	—	5/013
0714	.068	3.165	—	—	—	5/014
0715	.070	.145	—	—	2/007	—
0716	.070	.301	—	—	2/011	—
0717	.070	.364	—	—	2/012	—
0718	.070	.426	—	—	2/013	—
0719	.070	.489	—	—	2/014	—
0720	.070	.495	—	—	—	5/015
0721	.070	.551	6	—	2/015	—
0722	.070	.610	—	—	—	5/016
0723	.070	.635	—	—	—	5/017
0724	.070	.667	—	—	—	5/018
0725	.070	.676	8	—	2/017	—
0726	.070	.735	—	—	—	—

### "O"- RINGS

Different Military specifications call for the same size O-Ring. The following table shows which Military Specs. use common O-Ring Shell or Dash # designators.

The following part number listing cross-references the above Military Specs with their corresponding dimensions and the Ja-Bar part number.

Group I Shell	Group II Shell	Group III Dash	Group IV Dash
MC38999	MC81511	MS29513	M83528/5
MC26482		MS9021	
		M83528/2	




Part No.	CS "B"	I.D. "C"	GRP I	GRP II	GRP III	GRP IV
0727	.070	.739	—	8	2/018	—
0728	.070	.801	9,10	—	2/019	—
0729	.070	.860	—	—	—	5/019
0730	.070	.864	9,10	—	2/020	—
0731	.070	.926	—	—	2/021	—
0732	.070	.989	11,12	—	2/022	—
0733	.070	1.046	—	—	—	—
0734	.070	1.110	—	—	—	—
0735	.070	1.114	13,14	13,14	2/024	—
0736	.070	1.176	—	—	025	—
0737	.070	1.230	—	—	—	5/020
0738	.070	1.239	15,16	15,16	2/026	—
0739	.070	1.296	—	—	—	—
0740	.070	1.364	17,18	17,18	2/028	—
0741	.070	1.485	—	—	—	—
0742	.070	1.609	—	—	—	—
0743	.070	1.614	—	—	030	—
0744	.070	1.674	—	—	—	—
0745	.070	1.735	—	—	—	—
0746	.070	1.864	—	—	032	—
0747	.070	1.980	—	—	—	—
0748	.070	3.009	—	—	—	—
0749	.070	3.170	—	—	—	—
0750	.070	3.489	—	—	043	—
0751	.076	.656	—	—	—	—
0752	.076	.779	—	—	—	—
0753	.084	.852	—	—	—	—
0754	.084	2.678	—	—	—	—
0755	.087	1.250	—	—	—	—
0756	.087	2.360	—	—	—	—

Part No.	CS "B"	I.D. "C"	GRP I	GRP II	GRP III	GRP IV
0757	.094	.750	—	—	—	—
0758	.095	.897	—	—	—	—
0759	.095	1.074	—	—	—	—
0760	.100	1.005	—	—	—	—
0761	.101	2.805	—	—	—	—
0762	.101	3.153	—	—	—	—
0763	.101	3.613	—	—	—	—
0764	.103	1.040	—	—	—	—
0765	.103	.612	—	—	2/114	—
0766	.103	.676	—	—	2/115	—
0767	.103	.799	—	—	2/117	—
0768	.103	1.240	—	—	—	—
0769	.103	1.362	—	—	2/126	—
0770	.103	1.487	19,20	—	2/128	—
0771	.103	1.612	21,22	—	130	5/022
0772	.103	1.737	23,24	—	2/132	—
0773	.103	1.790	—	—	—	5/023
0784	.103	1.862	—	—	2/134	—
0785	.103	2.362	—	—	2/142	—
0786	.103	2.550	—	—	2/145	—
0774	.103	3.987	—	—	2/155	—
0775	.115	2.683	—	—	13/029	—
0776	.115	2.876	—	—	—	—
0777	.139	2.011	—	—	13/022	—
0778	.147	2.265	—	—	—	—
0779	.147	3.690	—	—	—	—
0780	.188	.673	—	—	—	—
0781	.210	3.475	—	—	—	—
0782	.243	3.409	—	—	—	—
0783	.394	3.464	—	—	—	—


# Conductive Particle Filled Elastomers

## Series 800



**"D"-RINGS**

Part No.	"A"	"B"	I.D "C"	Radius	M83528 Dash
0801	.048	.078	.587	FULL	13/004
0802	.048	.078	.587	FULL	—
0803	.056	.082	.410	.041	13/002
0804	.059	.093	2.705	FULL	—
0805	.059	.095	3.193	FULL	—
0806	.061	.025	.180	FULL	—
0807	.061	.039	.151	FULL	—
0808	.062	.069	.893	FULL	—
0809	.062	.096	1.562	FULL	—
0810	.065	.099	1.122	.049	13/008
0811	.066	.059	.565	FULL	—
0812	.067	.097	1.094	FULL	—
0813	.069	.094	1.072	FULL	—
0814	.070	.065	.809	FULL	—
0815	.073	.034	.230	FULL	—
0816	.076	.095	1.397	FULL	—
0817	.076	.097	1.581	FULL	—
0818	.076	.097	1.460	FULL	—
0819	.076	.113	1.262	FULL	—
0820	.077	.103	1.511	FULL	—
0821	.077	.115	1.310	FULL	13/012
0822	.078	.105	1.550	FULL	13/017
0823	.083	.093	1.357	FULL	—
0824	.085	.095	1.392	FULL	13/014
0825	.088	.095	1.340	FULL	13/011
0826	.101	.130	.592	FULL	—
0827	.118	.174	1.385	FULL	—
0828	.120	.152	.865	FULL	—
0829	.123	.123	.853	FULL	—
0830	.125	.138	2.859	FULL	—
0831	.125	.155	.885	FULL	13/006
0832	.130	.180	3.412	FULL	—
0833	.188	.234	3.837	FULL	—
0834	.188	.240	3.910	FULL	13/036

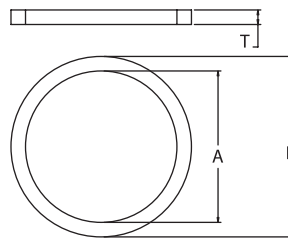

**Flat Washer**

Part No.	"A"	"B"	"T"	MC5051/ MC26482	M83528 Dash
0840	.250	.625	.031	—	12/001
0841	.250	.625	.062	—	12/002
0842	.319	.422	.075	8	—
0843	.328	.391	.031	—	—
0844	.375	.750	.031	—	12/003
0845	.375	.750	.062	—	12/004
0846	.406	.469	.031	10S/SL	—
0847	.447	.550	.075	10	—
0848	.500	.875	.031	—	—
0849	.500	.656	.031	—	12/005
0850	.500	.656	.062	—	12/006
0851	.500	.656	.031	—	12/007
0852	.500	.875	.062	12/008	—
0853	.531	.594	.031	12/12D	—
0854	.547	.703	.075	12	—
0855	.641	.703	.031	14/14S	—
0856	.671	.828	.075	14	—
0857	.750	1.000	.031	—	12/009
0858	.750	1.000	.062	—	12/010
0859	.781	.844	.031	16/16S	—
0860	.797	.953	.075	16	—
0861	.891	.953	.031	18	—
0862	.891	1.047	.075	—	—
0863	.984	1.047	.031	20	—
0864	1.000	1.438	.031	—	12/011
0865	1.000	1.438	.062	—	12/012
0866	1.039	1.172	.075	20	—
0867	1.109	1.172	.031	22	—
0868	1.141	1.297	.075	22	—
0869	1.219	1.281	.031	24	—
0870	1.266	1.422	.075	24	—
0871	1.455	1.547	.045	28	—
0872	1.672	1.766	.045	32	—
0873	1.891	1.984	.045	36	—

Series 800




# Conductive Particle Filled Elastomers

## Series 800

### Waveguide Connector Gaskets

Ja-Bar Silicone offers a complete selection of waveguide cover, choke, and contact flange gaskets for pressure and EMI/RFI sealing. All of our Silver Filled, "Non-Corrosive Particle" Filled elastomers can be produced into the configurations shown below. The thickness of the die cut gasket is .027+-.003 unless otherwise specified at time of order. The most commonly used waveguide flange requirements are separated into groups for clarification and ease of cross-reference to Ja-Bar Silicone's part number:

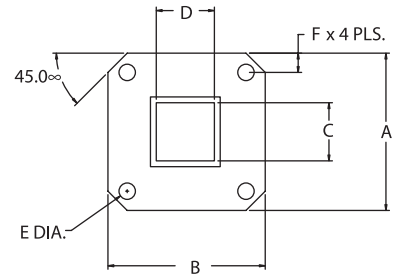


Group I	Group II	Group III Flange	Group IV Description	Group V	Group VI
M83528	EIA SIZE WR	JAN RG-/U	UG	CPR	CMR

### DIE-CUT SQUARE RECTANGLE WAVEGUIDE CONNECTOR GASKETS

Part No.	"A"	"B"	"C"	"D"	"E"	Group I	Group II	Group III	Group IV	Group V	Group VI
2801	1.496	1.796	.760	.385	.155	13/007	75	—	—	—	—
2802	.750	.750	.145	.285	.116	13/001	28	96	599	—	—
2803	.875	.875	.175	.425	.116	13/003	42	53/121	595/97	—	—
2804	1.313	1.313	.630	.320	.140	13/005	62	91/107	419	—	—
2805	1.625	1.625	.905	.405	.169	13/009	90	52/67	39/135	—	—
2806	1.875	1.875	1.130	.505	.180	13/015	112	51/68	51/138	—	—
2807	3.750	5.440	1.710	3.410	.264	13/038	340	112/112	533/54	—	—
2808	4.188	6.344	2.160	4.310	.266	13/040	430	104/105	435/37	—	—
2809	5.438	8.688	3.260	6.510	.250	13/042	650	69/103	417/418	—	—
2810	1.594	2.094	.405	.905	.169	13/010	90	52/67	1736/37	90F	—
2811	1.937	2.687	.633	1.380	.206	13/020	137	50/106	1732/33	137F	—
2812	2.438	3.188	.805	1.600	.257	13/024	159	—	1730/31	159F	—
2813	3.500	2.500	4.880	.880	.266	13/027	187	49/95	1728/29	187F	—
2814	2.750	3.875	1.155	2.300	.270	13/031	229	—	1726/27	229F	—
2815	4.500	3.000	2.850	1.350	.266	13/034	284	48/75	1724/25	284F	—
2816	3.750	5.438	1.710	3.410	.266	13/039	340	112/112	—	340F	—
2817	6.344	4.188	4.310	2.160	.266	13/041	430	104/105	—	430F	—
2818	1.531	2.281	.632	1.382	.150	13/021	137	51/106	—	—	137
2819	1.750	2.500	.800	1.600	.160	13/025	159	—	—	—	159
2820	1.784	2.781	.882	1.882	.156	13/028	187	49/95	—	—	187
2821	2.000	3.156	1.155	2.300	.150	13/032	229	—	—	—	229
2822	3.844	2.344	2.850	1.350	.172	13/035	284	48/75	—	—	284
2823	1.750	2.500	.505	1.130	.171	13/016	—	—	—	—	—
2824	6.344	4.188	4.300	2.150	.147	—	—	—	—	—	—
2825	4.188	6.344	2.150	4.300	.328	—	—	—	—	—	—
2826	3.750	5.438	1.715	.281	.264	—	—	—	—	—	—
2827	2.000	3.156	1.155	3.000	.188	—	—	—	—	—	—
2828	1.875	1.875	1.182	.527	.250	—	—	—	—	—	—
2829	1.875	1.875	1.182	.527	.180	—	—	—	—	—	—

# Conductive Particle Filled Elastomers


## Series 800



### DIE- CUT CIRCULAR WAVEGUIDE CONNECTOR GASKETS


Part No.	"A"	"B"	"C"	"D"	Thick.	Group I	Group II	Group III	Group IV	Group V	Group VI
2831	3.125	.632	1.382	.234	.027	13/019	137	50/106	344/441	—	—
2832	3.625	.882	1.882	.234	.027	13/026	187	49/95	149A/407	—	—
2833	5.312	1.350	2.850	.290	.027	13/033	284	48/75	53/584	—	—

### MOLDED RECTANGULAR/"O" CROSS SECTION WAVEGUIDE CONNECTOR GASKETS



Part No.	"A"	"B"	"T"	Group I	Group II	Group III	Group IV	Group V
2834	1.368	.868	.103	13/013	90	52/67	1360/61	90-G
2835	1.616	.991	.103	13/018	112	51/68	1494	
2836	1.866	1.116	.106	13/023	137	50/106	1356/57	137-G
2837	2.449	1.449	.139	13/030	187	49/95	1352/53	187-G
2838	3.451	1.951	.139	13/037	284	48/75	1348/49	284-G

### MOLDED RECTANGULAR WITH "D" CROSS SECTION WAVEGUIDE CONNECTOR GASKETS



Part No.	"A"	"B"	"C"	"D"	Group I
2840	.988	.290	.083	.127	6/001
2841	.988	.490	.083	.127	6/002
2842	3.000	.830	.083	.127	6/003
2843	5.280	1.340	.083	.127	6/004
2844	2.980	1.480	.125	.127	6/005
2845	5.970	1.500	.125	.187	—
2846	3.000	.830	.135	.187	—
2847	3.000	1.273	.135	.187	—
2849	5.280	1.340	.135	.187	—